
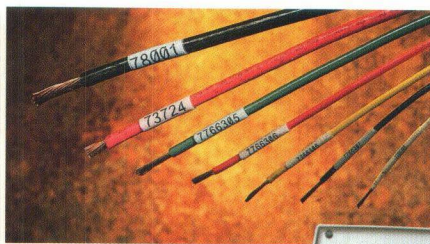


# Make the connection to more powerful labeling options with the TLS-PC Link™ Printer.



The TLS-PC Link™ Thermal Labeling System is a rugged portable/desktop solution. Use the power of your PC for more versatile labeling options.

### Versatile label options

Uses all of the available TLS 2200 printer materials and ribbons, including bulk roll material.

### Easy-to-use label design software

Brady LabelMark™ Labeling Software is included with your TLS-PC Link, and BradySoft™ 8 Label Design Software is also available for use with this system.

### Windows™ driver included

This driver allows you to easily print labels from either Brady labeling software solution.



## TLS-PC Link™ Thermal Labeling System

### Part Number: TLSPC

Printer (system includes LabelMark™ Labeling Software, rechargeable battery pack, power supply/battery charger, R6210 ribbon, sample labels (PTL-19-423), Quick Start Guide, manual, communications cable, and Windows drivers)

- Prints over 500 labels between battery charges
- Weight 2.50 lbs (1.14 kg)
- Thermal Transfer print mechanism 203 dpi (8 dots/mm)
- Labels up to 2" wide (50.8 mm)
- Print length up to 6" (152.4 mm)
- FCC Class A approved
- Adjustable for 6 different widths of labels
- Built-in industrial label cutter
- Patent numbers 5,918,989; 5,951,177; 6,113,293 and 6,142,686
- Custom TrueType font
- Print width 1.81" (46 mm)
- Operating temperature range: 40°F to 120°F (4°C to 49°C)
- UL and CUL listed AC adapter/battery charger: 120 V/60 hz input 12 VDC 3000 mA output

### TLS-PC Link Thermal Labeling System Accessories

Part	Description
TLSPC-AC	Replacement power supply/battery charger
TLSPC-BP	Rechargeable battery pack
TLSPC-CABLE	Communications cable
PCK-5	Cleaning kit (includes 5 cleaning cards)